SKOPE®

Food Storage Series

Fridge, Freezer, Combo

ReFlex

ProSpec

featuring

SKOPE-connect™
puts you in control

R290 Natural Refrigerant
a green choice



SKOPE®

It's time to flex some muscle





ReFlex

Reliable Strength. Incredible Technology

Unrivalled features at exceptional value

Reduce your energy costs & carbon footprint

Ultra-precise food storage temperatures

Manage, monitor, control from your smartphone

Legendary SKOPE toughness

SKOPE-connect™

R290 Natural Refrigerant

skope.com

ReFlex™ Series
Underbench

Food Storage

Fridge or Freezer

GN Compatible

ReFlex underbench fridges provide durable, long-lasting quality and modern features at exceptional value. Designed for food service businesses looking to maximize every dollar, ReFlex combines cutting edge power savings and the time-saving advantages of the SKOPE-connect app, with traditional SKOPE toughness and temperature consistency.



ReFlex



RF7.UBR.2.SD (Fridge)
RF7.UBF.2.SD (Freezer)



RF7.UBR.3.SD (Fridge)
RF7.UBF.3.SD (Freezer)



RF7.UBR.4.SD (Fridge)

Standard finish: 304 Stainless Steel*
Standard Models: 2, 3 & 4 solid door Fridge, 2 & 3 solid door Freezer

SKOPE-connect™

R290 natural refrigerant

Restaurants / Cafés

Quick Service Restaurants

Clubs / Pubs / Bars

Hospitality Venues

Accommodation

Medical / Aged Care

Schools

Quick Guide

- Premium build quality
- Monitor and control with the SKOPE-connect™ app
- Very good energy efficiency
- Operates in 40ºC ambient
- R290 Natural Refrigerant with minimal environmental impact
- Premium quality 304 stainless steel outer and inner*
- Stainless steel benchtop as standard
- Easy-to-service refrigeration cartridge system
- Gastronorm compatible
- Fridge or freezer models available

Standard Features	Benefits
Front breathing refrigeration system	Built in design to save space
Fan forced ducted airflow	Consistent temperature for food safety
Door activated interior LED lighting	Easy to find stored products
Key locks on all doors	Extra security
Self closing, self sealing doors	Convenient, reliable closure
Replaceable long life magnetic door gaskets	Reliable door seal for improved efficiency
Coved interior floors & premium grade stainless steel	Very durable and easy to clean
Heated fascia	Eliminates condensation
Easy grip handle design	Comfortable and convenient access
Supplied with lockable front castors, non-locking rear castors (135mm) and a set of adjustable legs (145-185mm)	For easy installation, positioning & relocation

Options	Notes
• 1 year extended warranty	*430 Stainless Steel used in some small functional areas of the cabinet.

Warranty
2 Year Protection

Compliance
Independently Verified

Food Safe
Keeps food below 5ºC

ReFlex™ Series
Underbench

Cabinet

Solid Doors	Stainless Steel, self closing, lockable, swing
Shelves	Grey Plastic Coated Wire
Breathes from/Expels to	Front/Front
External & Internal	304 AISI Stainless Steel
Coved Floor	Yes
Worktop (45mm thick)	0.7mm 304 AISI Stainless Steel over insulating cyclopentane foamed core

Performance

Temperature Range	M1 Fridge: -1 to 5°C (adjustable with SKOPE-connect -2 to 10°C)
	L1 Freezer: less than -18°C (adjustable with SKOPE-connect -26 to -12°C)
Climate Class	5 (Heavy Duty) 40°C / 40%RH
Maximum Ambient Temperature	40°C

Refrigeration


Controller	Electronic with SKOPE- connect™
Connectivity	Via Bluetooth
System	Side Mount, Removable, Self Contained
Refrigerant	R290 Natural Refrigerant
Drainage	No plumbing required

Electrical


Power Supply	220-240 Volts a.c 50 Hz single phase supply
Plug	10 Amp 3 pin & 2.6m cable
	where applicable cabinets are supplied with correct regional plug types

Front **Side** **Top**


RF7.UBR.2.SD
RF7.UBF.2.SD

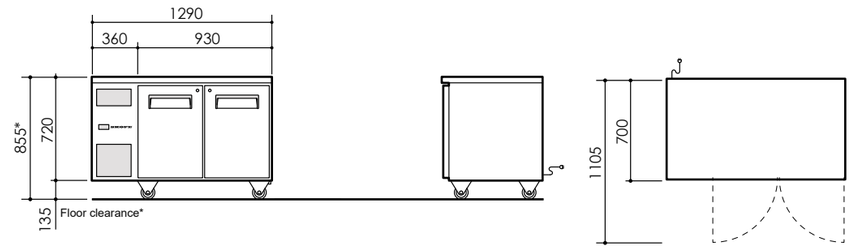

RF7.UBR.3.SD
RF7.UBF.3.SD

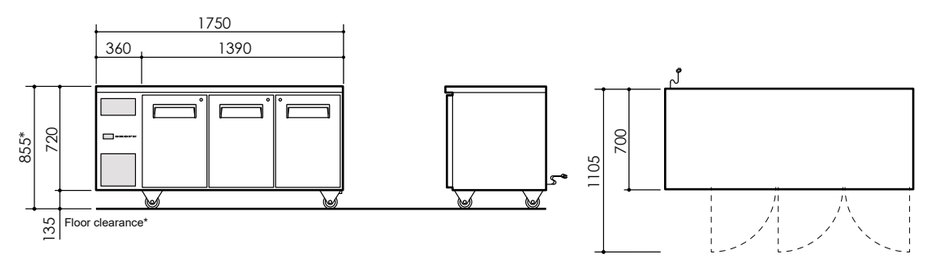

RF7.UBR.4.SD

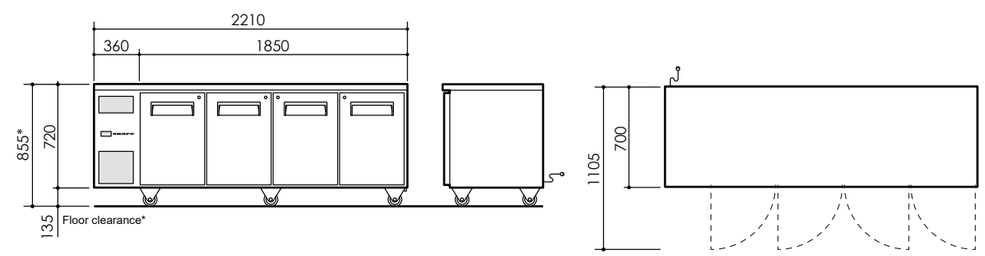

Specifications

	Model ID	Fridge/Freezer	Doors	Door Type	Door Hinge	External Dimensions (W x D x H* mm)	Adjustable Shelves (No.)	Adjustable Shelves Size (W x D mm)	Interior Lighting**	Total Floor Area (m2)	Weight (kg)	Gross Internal Volume (litres)	Refrigerant / Charge	Current Draw (Amps)	Nominal Capacity (Watts)
	RF7.UBR.2.SD	Fridge	2	Solid	LH/RH	1290 x 700 x 855	4	395 x 510	1	0.90	106	248	R290 / 80g	2.0	450
	RF7.UBF.2.SD	Freezer	2	Solid	LH/RH	1290 x 700 x 855	4	395 x 510	1	0.90	112	248	R290 / 90g	4.0	500
	RF7.UBR.3.SD	Fridge	3	Solid	LH/LH/RH	1750 x 700 x 855	6	395 x 510 (Outer) 455 x 510 (Middle)	2	1.23	130	387	R290 / 95g	2.0	650
	RF7.UBF.3.SD	Freezer	3	Solid	LH/LH/RH	1750 x 700 x 855	6	395 x 510 (Outer) 455 x 510 (Middle)	2	1.23	136	387	R290 / 90g	4.0	500
	RF7.UBR.4.SD	Fridge	4	Solid	LH/LH/RH/RH	2210 x 700 x 855	8	395 x 510 (Outer) 455 x 510 (Middle)	3	1.55	155	526	R290 / 95g	2.0	650

* Cabinet height with fitted castors: 855mm. Cabinet height variation with supplied adjustable legs: 865 - 905mm. Cabinet height with no castors or legs: 720mm.
Before installing these cabinets please refer to the models specification sheet for dimensional tolerances and ventilation requirements
For full product technical and specification information always refer to the models specification sheet; download at **skope.com**

** Door Activated Interior Lighting
Underbench: 400mm 4W LED

ReFlex™ Series

Upright

Food Storage

Fridge, Freezer

or Combo

ReFlex upright food storage fridges and freezers offer premium food safety security and smart asset management features at accessible prices. ReFlex uprights are where cutting edge power savings and modern, app-based food safety solutions meet rock-solid SKOPE design principles.



ReFlex



RF7.UPR.1.SD (Fridge)
RF7.UPF.1.SD (Freezer)



RF7.UPR.2.SD (Fridge)
RF7.UPF.2.SD (Freezer)



RF8.UPC.2.SD (Combo)

Standard finish: 304 Stainless Steel*
Standard Models: 1 solid door Fridge or Freezer, 2 solid doors Fridge or Freezer or Combo

SKOPE-connect™

R290 natural refrigerant

- Restaurants / Cafés
- Quick Service Restaurants
- Clubs / Pubs / Bars
- Hospitality Venues
- Accommodation
- Medical / Aged Care
- Schools

Quick Guide

- Premium build quality
- Monitor and control with the SKOPE-connect™ app
- Very good energy efficiency
- Operates in 40ºC ambient
- R290 Natural Refrigerant with minimal environmental impact**
- Premium quality 304 stainless steel outer and inner*
- Easy-to-service refrigeration cartridge system
- Fridge or freezer or combo models available

Standard Features	Benefits
Fan forced ducted airflow	Consistent temperature for food safety
Door activated interior LED lighting	Easy to find stored products
Key locks on all doors	Extra security
5 levels of adjustable & removable tray slides	For maximum product storage flexibility
Coved floors & premium grade stainless steel	Very durable and easy to clean
90° Stay-open door function	For product reloading convenience
Heated fascia	Eliminates condensation
Self closing, self sealing doors	Convenient, reliable closure
Easy grip handle design	Comfortable and convenient access
Supplied with lockable front castors, non-locking rear castors (135mm) and a set of adjustable legs (120-160mm)	For easy installation, positioning & relocation

Options	Notes
• 1 year extended warranty	*430 Stainless Steel used in some small functional areas of the cabinet. ** 2 door Freezer RF7.UPF.2.SD R404A

Warranty
2 Year Protection

Compliance
Independently Verified

Food Safe
Keeps food below 5ºC

ReFlex™ Series

Upright

Cabinet

Solid Doors	Stainless Steel, self closing, lockable, swing
Shelves	Grey Plastic Coated Wire
Breathes from/Expels to	Top and Front/Top and Front
External & Internal	304 AISI Stainless Steel
Coved Floor	Yes
Worktop	N/A

Performance

Temperature Range	M1 Fridge: -1 to 5°C (adjustable with SKOPE-connect -2 to 10°C) L1 Freezer: less than -18°C (adjustable with SKOPE-connect -26 to -12°C)
Climate Class	5 (Heavy Duty) 40ºC / 40%RH (RF7.UPF.2SD 4 (Standard Duty) 30°C / 55%RH)
Maximum Ambient Temperature	40ºC

Refrigeration


Controller	Electronic with SKOPE- connect™
Connectivity	Via Bluetooth
System	Top Mount, Removable, Self Contained
Refrigerant	R290 Natural Refrigerant
Drainage	No plumbing required

Electrical


Power Supply	220-240 Volts a.c 50 Hz single phase supply
Plug	10 Amp 3 pin & 2.6m cable where applicable cabinets are supplied with correct regional plug types

Front **Side** **Top**


RF7.UPR.1.SD
RF7.UPF.1.SD

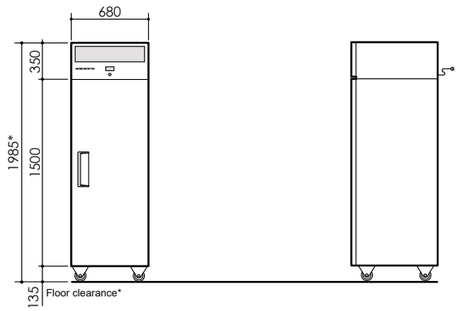

RF7.UPR.2.SD
RF7.UPF.2.SD

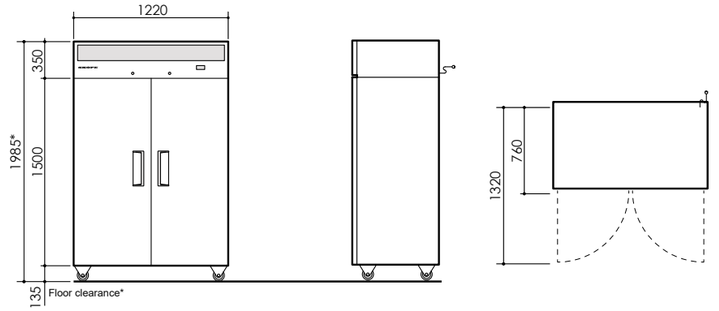

RF8.UPC.2.SD

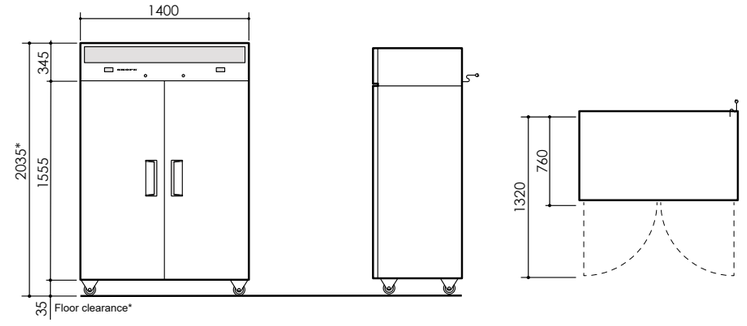

Specifications

	Model ID	Fridge/Freezer	Doors	Door Type	Door Hinge	External Dimensions (W x D x H* mm)	Adjustable Shelves (No.)	Adjustable Shelves Size (W x D mm)	Interior Lighting**	Total Floor Area (m2)	Weight (kg)	Gross Internal Volume (litres)	Refrigerant / Charge	Current Draw (Amps)	Nominal Capacity (Watts)
	RF7.UPR.1.SD	Fridge	1	Solid	RH	680 x 760 x 1985	5	540 x 530	1	0.52	115	470	R290 / 70g	2.0	450
	RF7.UPF.1.SD	Freezer	1	Solid	RH	680 x 760 x 1985	5	540 x 530	1	0.52	122	470	R290 / 94g	4.0	550
	RF7.UPR.2.SD	Fridge	2	Solid	LH/RH	1220 x 760 x 1985	10	530 x 530	2	0.93	159	920	R290 / 90g	2.0	650
	RF7.UPF.2.SD	Freezer	2	Solid	LH/RH	1220 x 760 x 1985	10	530 x 530	2	0.93	171	920	R404A / 440g	4.0	600
	RF8.UPC.2.SD	Fridge/Freezer	2	Solid	LH/RH	1400 x 820 x 2035	10	530 x 595	2	1.15	227	513 (x2)	R290 / 70g / 94g	6.0	450/550


* 1 & 2 door cabinet height with fitted castors: 1985mm. Cabinet height variation with supplied adjustable legs: 1995 - 2035mm. Cabinet height with no castors or legs: 1850mm.
Combo height with fitted castors: 2035mm. Cabinet height variation with supplied adjustable legs: 2045 - 2085mm. Cabinet height with no castors or legs: 1915mm.
Before installing these cabinets please refer to the models specification sheet for dimensional tolerances and ventilation requirements
For full product technical and specification information always refer to the models specification sheet; download at **skope.com**

** Door Activated Interior Lighting
Upright: 1200mm 12W LED

SKOPE®

The new mark
of a professional



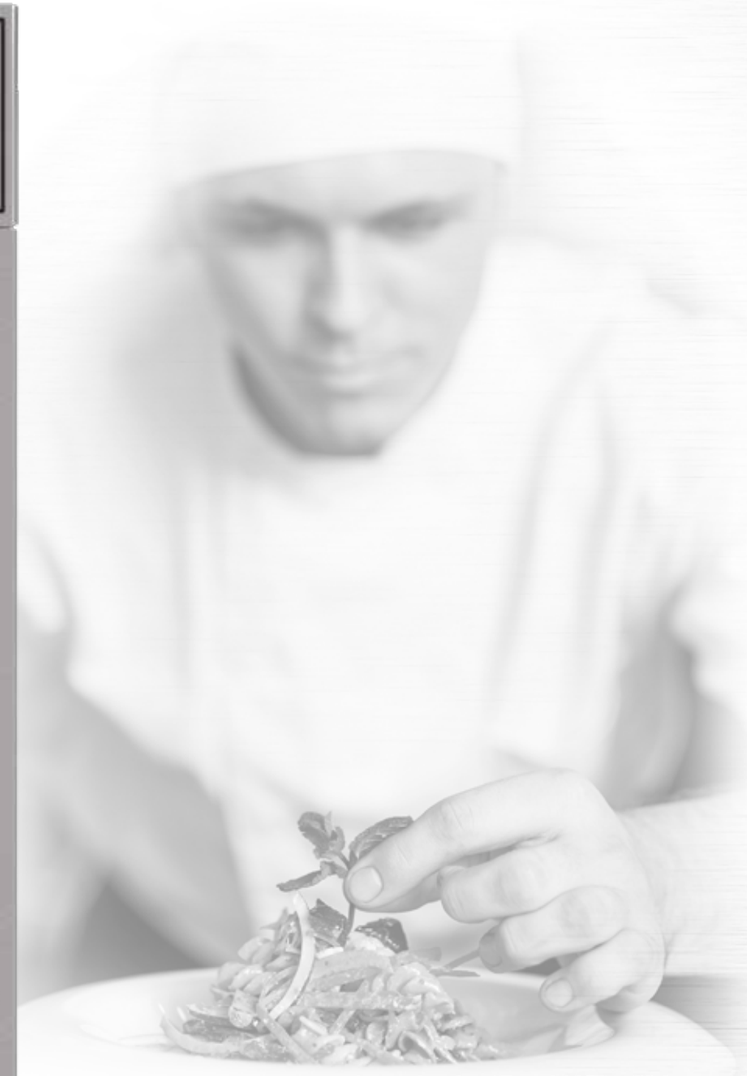

ProSpec

You need to think outside the box to create culinary excellence.
So why choose cold storage that boxes you in?

Choose market-leading configuration options designed for chefs. Choose professional-grade quality refrigeration and smart technology. Choose to make your mark.

- **SKOPE-connect™**
- **R290 Natural Refrigerant**
- **ActiveCore™ Technology**
- **5 Year Warranty Protection**

skope.com

ProSpec™ Series
Upright

Food Storage

Fridge

2/1 GN Sized

Designed for professionals, the ProSpec Series is our best available cold storage solution with all our latest innovations combined with optimal power savings delivered through our ActiveCore™ R290 green refrigeration technology.



ProSpec



PG21.UPR.1.SD



PG21.UPR.2.SD

Standard finish: 304 Stainless Steel* NOTE: Above images are renders for illustrative purposes only
Standard Models: 1& 2 Solid Door Fridge

SKOPE-connect™ **R290** natural refrigerant **ActiveCore™ Technology**

Restaurants / Cafés

Quick Service Restaurants

Clubs / Pubs / Bars

Hospitality Venues

Accommodation

Medical / Aged Care

Schools

Quick Guide

- ActiveCore technology
- Professional specification
- Designer styling for a seamless, minamilistic look
- Operates in 40ºC ambient
- Exceptional energy efficiency
- SKOPE-connect™ enabled
- Quiet operation
- R290 Natural Refrigerant with minimal environmental impact
- 5 Years full warrranty (parts & labour)
- Gastronorm sized

Standard Features	Benefits
Premium grade stainless steel throughout	Long life durability
Designer look with a seamless external finish	Premium appearance with easy to clean surfaces
Fan forced ducted airflow	Maintain a consistent temperature for food safety
Extra thick 80mm foam body	Maximum strength, durability insulation and energy savings
Door activated interior LED lighting	Easy to find stored products
Coved interior floors	Very durable and easy to clean
90° stay-open door function	For product reloading convenience
Key barrel locks on all doors	Extra security

Options	Notes
• Reversible Door Hinge Kit	*430 Stainless Steel used in some small functional areas of the cabinet. **In development** Additional models Comprehensive options & upgrades **Technical Information** Refer Product Specification Sheets at skope.com

Full Warranty ActiveCore™ Series

Compliance Independently Verified

Food Safe Keeps food below 5ºC

SKOPE Funding

Enjoy Peace of Mind with a Tailored Ownership Plan

Own Me - Ownership Plan

- Free up cashflow
- Extend your warranty protection
- Annual planned maintenance included
- Flexible term, choice of 1, 2, 3, 4 or 5 years
- Affordable monthly payments
- No end of term balloon or residual payment
- Ownership at end of term
- Load your balance sheet and claim depreciation, and GST

Quick & Easy Application

Apply Now Online
skope.com/funding

By Phone
AUS 1800 121 535 (opt 4)
NZ 0800 947 5673 (opt 4)

By Email
skopefunding@skope.com

Head Office

New Zealand
SKOPE Industries Limited
57 Princess Street
PO Box 1091
Christchurch 8140
New Zealand
International Tel: +64 (3) 983 3800

Customer Services

Australia
Freephone: 1800 121 535
Email: skope@skope.com

New Zealand
Freephone: 0800 947 5673
Email: skope@skope.com

skope.com