Rotel®
VTL ADVANTAGE

CHEFS DEPOT
Culinary Supplies

AUR33D3S
AUR34DHC
AUR34D1S

TECHNICAL DATA SHEET FOR

ROTEL BAKERY OVENS AUR33D3S, AUR34DHC AND AUR34D1S

STANDARD FEATURES

VTL - variable temperature loading
- energy efficient
- ease of operation
- less down time

Live inbuilt steaming system fitted to all chambers
Interior lamps fitted standard to all chambers.
Each chamber individually controlled
Touch screen controllers centrally mounted

OVERALL CONSTRUCTION

Internal baking chambers stainless steel
Facia and sides stainless steel
Doors all stainless steel construction
Tempered 10mm thick door glass
Tray holders welded steel and fitted standard to all decks
Turntable drive system bottom mounted
Casters fitted as standard

OPERATION

Touch screen controllers that operate with minimal staff input
Individual chamber control display
Icon category menu
Up to 99 baking programs (universal programming for all decks)
Programmable time, temp, steam and top/bottom heat balance
Automatic preheating of all decks
Automatic energy saving temperature set-back / idle
Split bake / multiple product program feature applied all decks
Manual bake mode
7 day auto-start
Low-temp bake mode
Automatic back up on event of controller failure
Temperature control range up to 270°C
Bake time range 0-120 minutes standard (adjustable to 256 minutes)

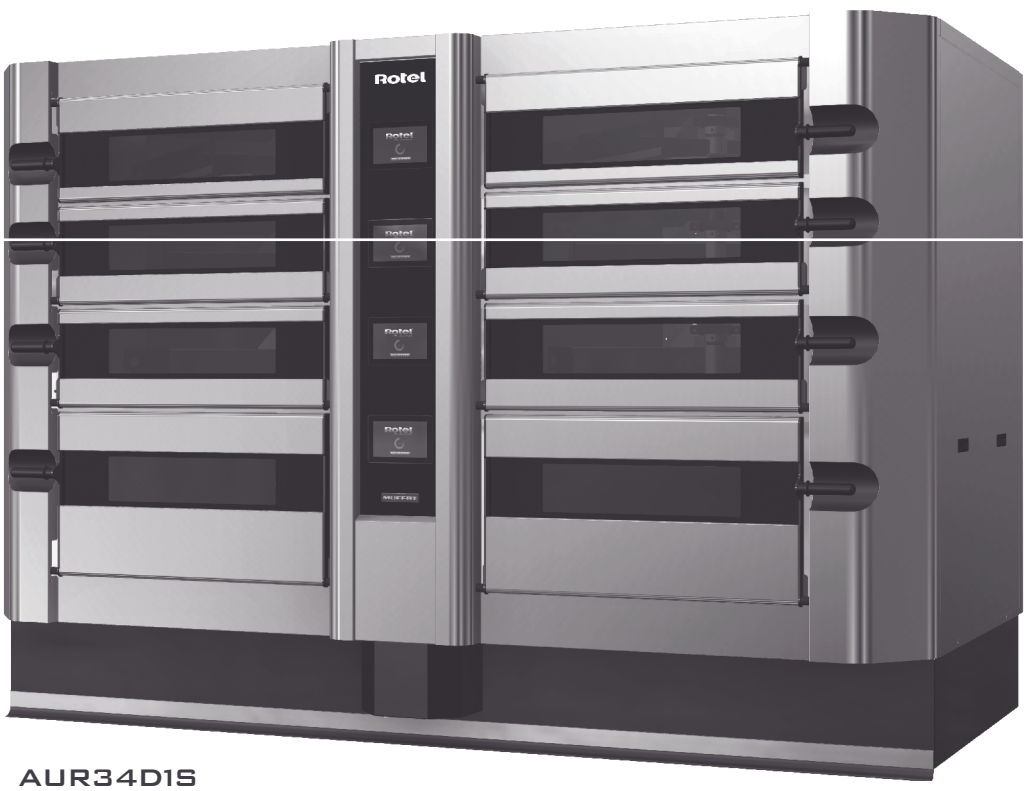

AUR34D1S

MOFFAT®

Bakery

Rotel®
VTL ADVANTAGE

AUR33D3S
AUR3DHC
AUR34D1S

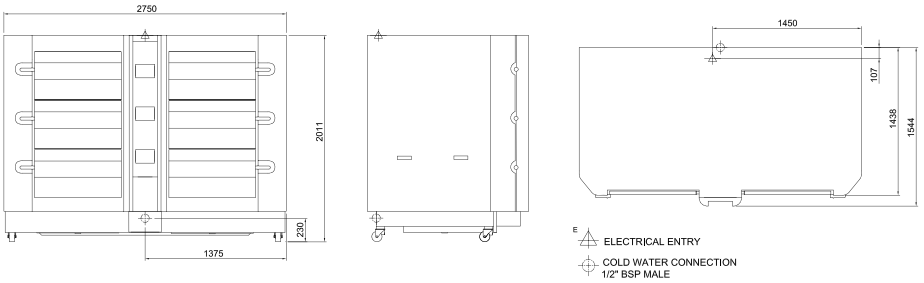

AUR33D3S

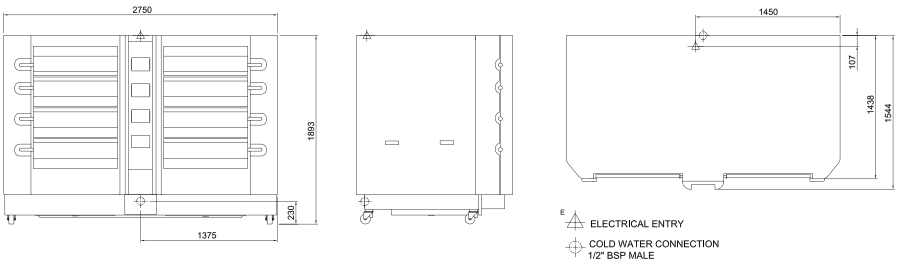

AUR34DHC

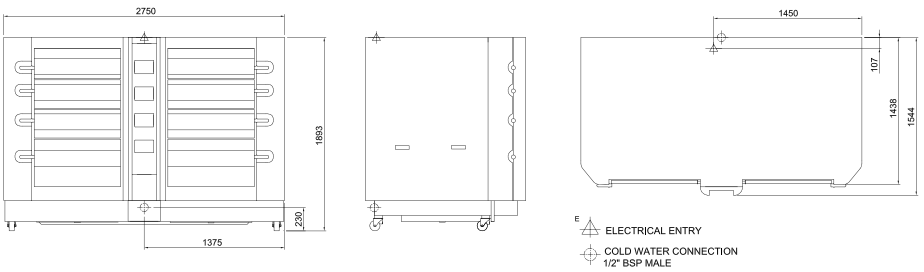

AUR34D1S

Model	Deck Configuration	Tray[1] Capacity	Loaf[2] Capacity	Dimensions W x D x H mm	Electrical Specifications
AUR33D3S	3 deck, 3 split	24 tray	120	2750 x 1528 x 2011	68kW, 3P+N+E, 400-415v, 50hz
AUR34D1S	4 deck, 1 split	20 tray	120	2750 x 1528 x 1893	58kW, 3P+N+E, 400-415v, 50hz
AUR34DHC	4 deck, high crown	16 tray	96	2750 x 1528 x 1893	48kW, 3P+N+E, 400-415v, 50hz

[1] Oven chambers accept 16" and 18" wide trays
[2] Standard 680gm loaf

Crown heights (usable)
Standard decks – 180mm (unless top deck)
Top decks – 200mm (unless split deck)
Split decks – 170mm (unless top split deck)
Top Split decks – 205mm / 135mm (offset split)

Model	**AUR33D3S**	**AUR34D1S**	**AUR34DHC**
Nett Weight	1600 kg	1600 kg	1600 kg
Packing Data			
Weight	1760 kg	1760 kg	1760 kg
Width	3090 mm	3090 mm	3090 mm
Depth	1900 mm	1900 mm	1900 mm
Height	2350 mm	2350 mm	2350 mm
Volume	13.8 m3	13.8 m3	13.8 m3

Bakery

MOFFAT®

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

New Zealand
Moffat Pty Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone 03-389 660
Facsimile 03-389 6660
sales@moffat.co.nz

Auckland
Telephone 09 -574 3150
sales@moffat.co.nz

Important Notice:
This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

24:7 Service Support

ISO9001 Quality Management Standard

MOFFAT®

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd

Moffat / 7.13 / 1360 / R10.21