CHEFS DEPOT
Culinary Supplies

Technical data sheet for

Waldorf 800 SERIES

FAST FRI SINGLE PAN GAS FRYER 600mm

FN8130G-HPO



- 140 MJ/hr continuous production single pan fryer
- High Power Output infra-red burner system
- Easy clean stainless steel open pan with 10 year limited warranty
- 31L oil tank capacity
- 2 large or 3 standard basket capacity
- Large capacity cool zone
- 32mm (1 1/4") drain valve
- Stainless steel exterior
- Easy service
- Fully modular
- Low back model (FNL) available

Overall Construction

- Stainless steel pan with 10 year limited warranty
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 32mm (1 1/4") drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 large standard baskets and stainless steel lid supplied standard

Controls – Burner System

- Electronic thermostat
- Large easy use control with easy view scale
- Thermostat range 90 – 195°C
- Over-temperature safety cut-out
- Full electronic ignition system
- Two 70MJ/hr power infra-red burners
- Independent LH and RH burner systems
- Lock-out alarm indicators on front panel

Cleaning and Servicing

- Open stainless steel pans for easy clean
- Easy clean basket support bar
- 32mm (1 1/4") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for

FAST FRI SINGLE PAN GAS FRYER 600mm

Waldorf 800 SERIES

Specifications

Production rate
50kg/hr
Pan Size
Width 515mm
Length 380mm
Oil frying depth 95mm
Oil capacity 31L (46.5lbs shortening)
Baskets
2 chrome plated large wire baskets
210mm W x 335mm D x 145mm H
Optional 3 chrome plated standard wire baskets
145mm W x 335mm D x 145mm H
Stainless steel perforated basket support plate
Burners
2 x 70MJ/hr power infra-red burners
Gas Power
140MJ/hr, 39kW
Gas connection
R ¾ (BSP) male
300mm from RH side, 35mm from rear,
and 125mm from floor
Optional rear connection
(refer specification drawing)
All units incorporate Natural and LP gas regulator
Electrical Connection
230-240 Vac, 1P+N+E, 50Hz, 0.5A
3 pin 10A cordset fitted

Dimensions
Width 600mm
Depth 805mm
Height 915mm
Incl. splashback 1130mm
Incl. low back 1085mm

Nett weight
100kg

Packing data
0.70m3, 148kg
Width 870mm
Depth 645mm
Height 1255mm

Gas types
Available in Natural gas and LP gas
Please specify when ordering
Units supplied complete with gas type
conversion kits
Other gas types on request

Options at extra cost
Waldorf Filtamax filtration system
Fish plates
Extra large baskets
Standard baskets
Side splash guards
Joining caps
Castors
Plinth mounting

FN8130G-HPO

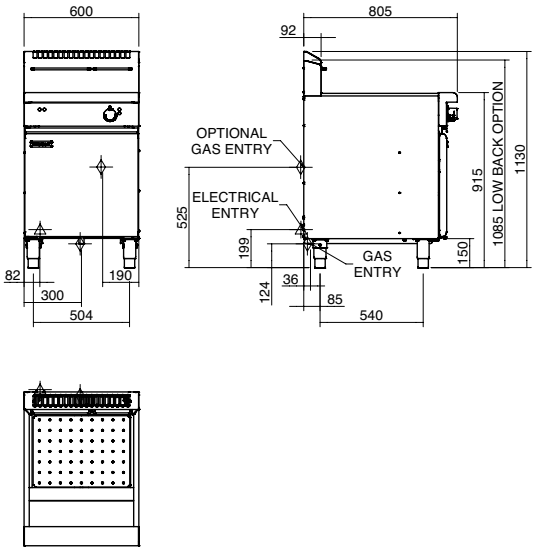

MOFFAT

moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz

24:7 Service Support

ISO9001 Quality Management Standard

Cert. No. 6882

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd

AN.W8.08/19