ZIP FLUSHMASTER SOLO WS005



Order Code 42214

Zip FlushMaster® Solo ceiling recessed infrared urinal flushing system with variable flush volume to meet your needs precisely.

- Today's most effective single-stall flushing system.
- Four-star WELS water rating, at 1.1 litre per flush.
- Outstanding water savings: soon pays for itself.
- Compact 80 mm ceiling-recessed infrared sensor.
- Narrow beam limits detection area to under 300 mm wide.
- Five second sensor delay beats accidental tripping.
- Adjustable flush cycle to meet your needs precisely.
- Factory set for 12 hour janitor flush when unused.
- Solenoid latching valve supplied with connections.
- Power pack (240/6 volt) connects to 10 amp GPO.

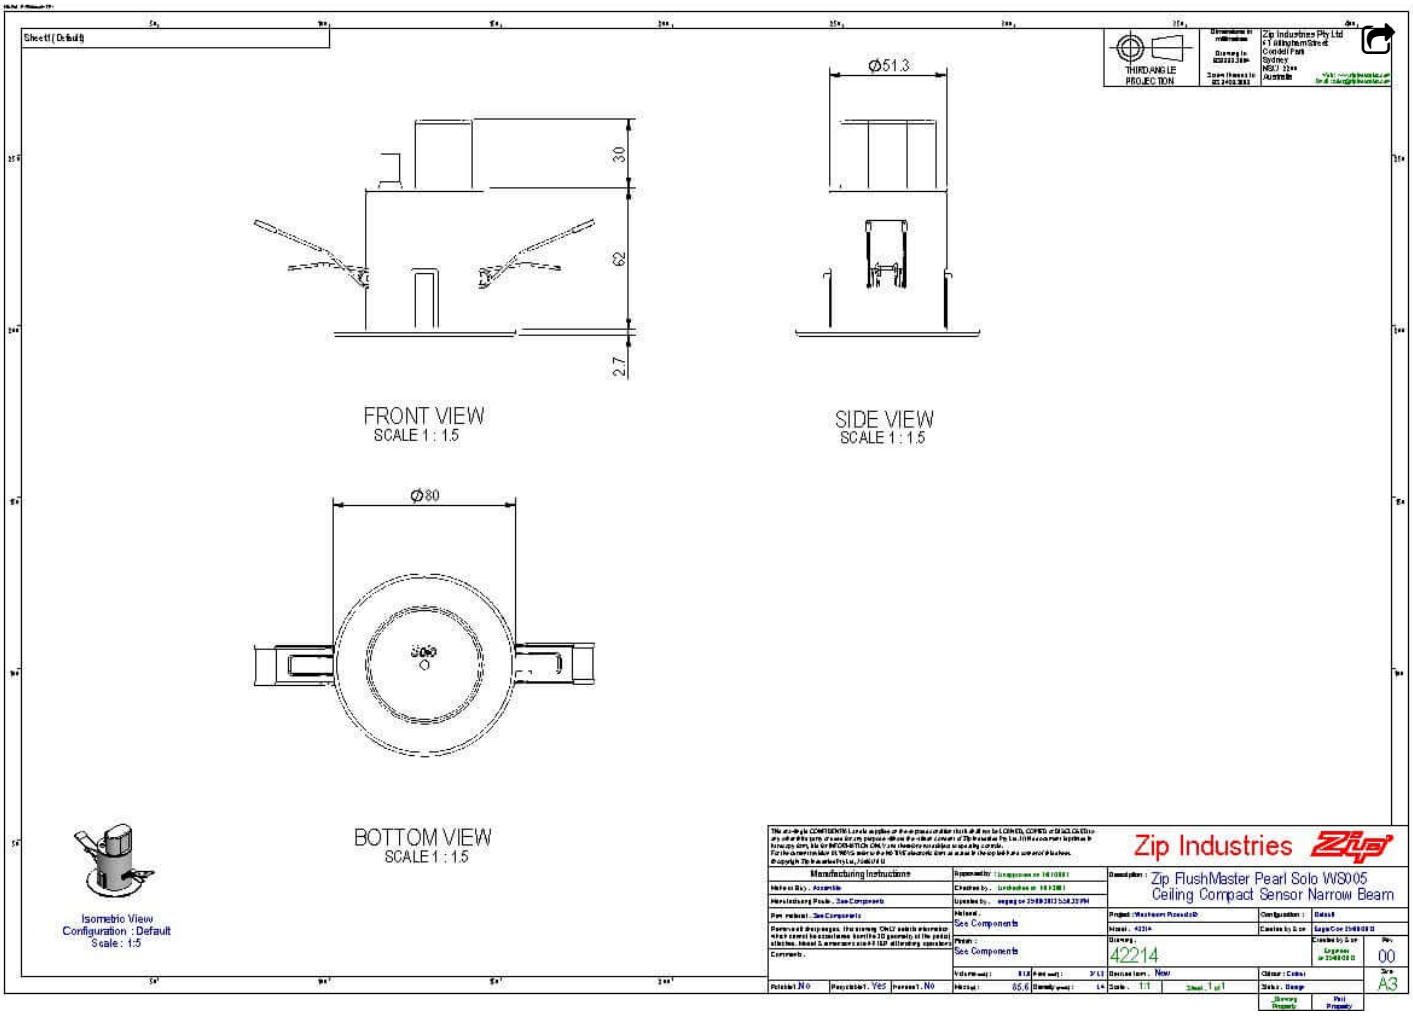
Manufacturing Code	42214

Water Pressure	min 100kPa - max 700kPa
Power Supply	6V transformer power pack 10amp GPO,220V - 240V AC
Dimensions	H92mm x D80mm
Product Approvals	WaterMark, CE,
Wels Rating	4 star
Warranty	1 Year

Installation Requirements

Must be installed by a suitably qualified person in accordance with manufacturers instructions and with all relevant plumbing and electrical regulations

Installation Detail


Sheet1 (Default)
THIRD ANGLE PROJECTION
Zip Industries Pty Ltd
Ø51.3
30
62
2.7
FRONT VIEW
SCALE 1 : 1.5
SIDE VIEW
SCALE 1 : 1.5
Ø80
BOTTOM VIEW
SCALE 1 : 1.5
Isometric View
Configuration : Default
Scale : 1:5
Manufacturing Instructions
See Components
See Components
Zip Industries
Zip FlushMaster Pearl Solo WS005
Ceiling Compact Sensor Narrow Beam
42214
00
A3
New
1:1