CHILLTAP 140 0.2MIC COMM 19

Order Code CT1501-1

Zip ChillTap under-bench chilled filtered drinking water appliance.

Manufacturing Code	CT28XCXC2AU



Tap	Carafe tap single lever
Water Pressure	150kPa- 700kPa
Water Connection	12.7mm BSP
Water Valves	intergrated 500kPa pressure limiting valve and Dual Check valve
Power Rating	0.33kW
Dimensions	H335mm x W280mm x D475mm
Warranty	12 months

Installation Requirements

'1. Installation and connection of your Zip ChillTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. ChillTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail

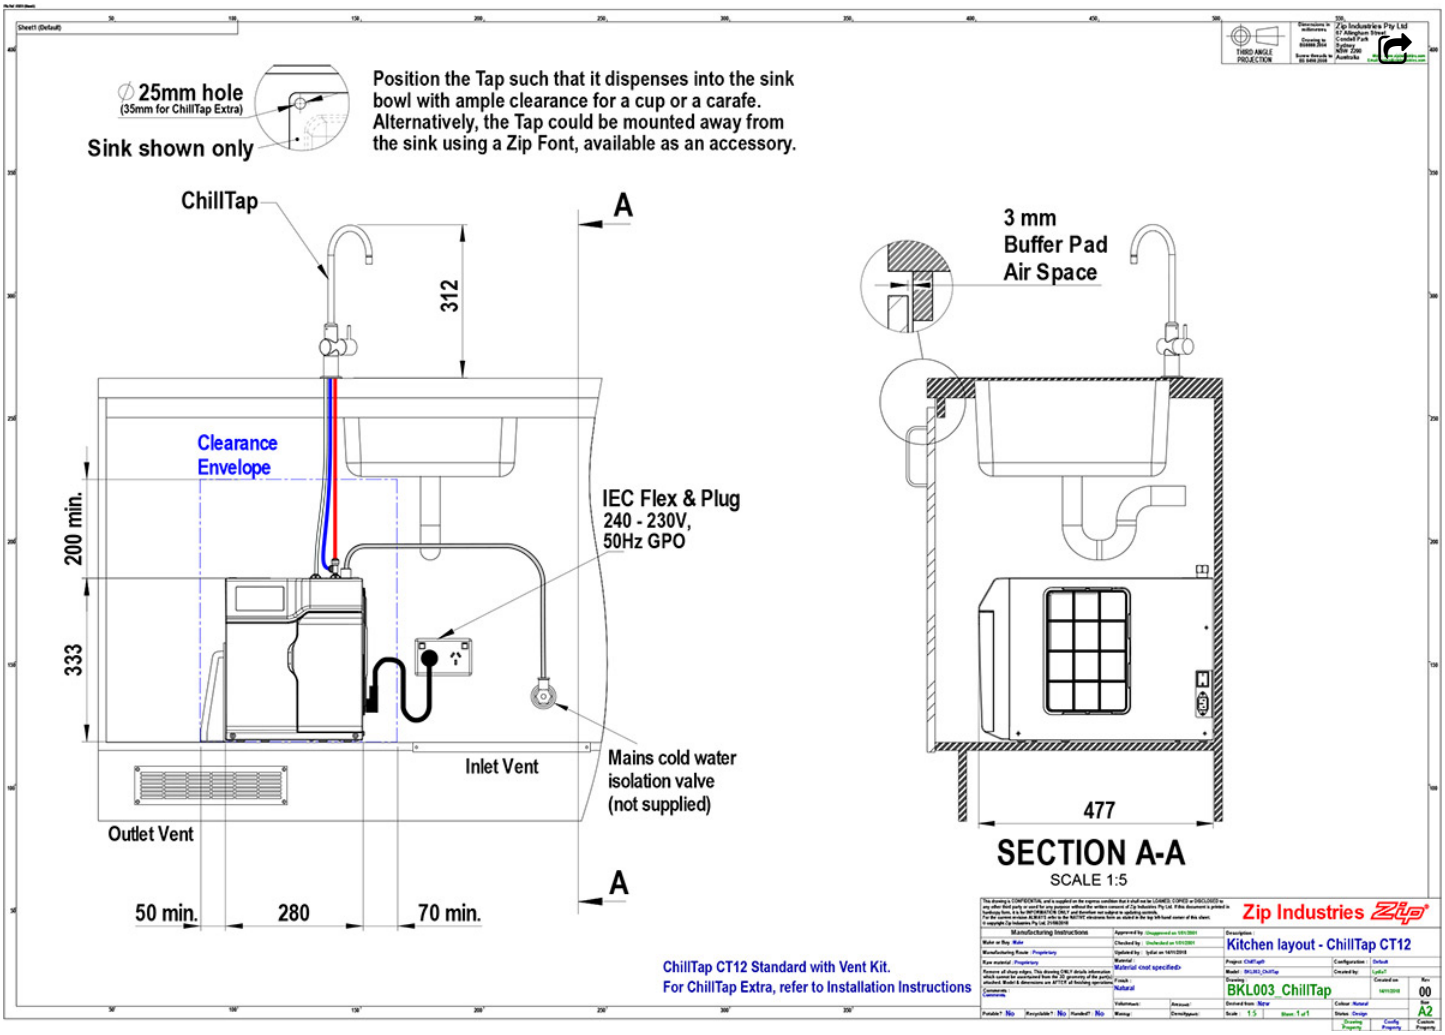
25mm hole
(35mm for ChillTap Extra)
Sink shown only
Position the Tap such that it dispenses into the sink bowl with ample clearance for a cup or a carafe. Alternatively, the Tap could be mounted away from the sink using a Zip Font, available as an accessory.
ChillTap
A
312
Clearance Envelope
200 min.
333
IEC Flex & Plug
240 - 230V,
50Hz GPO
Mains cold water isolation valve (not supplied)
Inlet Vent
Outlet Vent
50 min.
280
70 min.
A
3 mm
Buffer Pad
Air Space
477
SECTION A-A
SCALE 1:5
ChillTap CT12 Standard with Vent Kit.
For ChillTap Extra, refer to Installation Instructions
Zip Industries
Kitchen layout - ChillTap CT12
BKL003_ChillTap
00
A2