ICEU225 - SELF CONTAINED CUBE ICE MAKER

COAST ICE & COLD SOLUTIONS

CHEFS DEPOT Culinary Supplies

ICEU225 SELF CONTAINED CUBE ICE MAKER



ICEU225

Features

- Space-saving 24" (623 mm) wide undercounter design.
- Produces up to 96 kg of ice per day.
- *Harvest Assist* provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice®* exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Coast's optional water filtration system provides protection against unpleasant tastes, odours and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Made in U.S.A.

Options & Accessories

WATER FILTERS		
Ice Machine Model	**Manifold**	
	System	Replacement
ICEU225	CD10B	CD100B

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.

Ice Form



CUBE

FULL CUBE DIMENSIONS	
W x D x H (mm)	22 x 22 x 22
HALF CUBE DIMENSIONS	
W x D x H (mm)	10 x 22 x 22

Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 32 kg of ice.
- Easy front access to ice.


ICEU225 - SELF CONTAINED CUBE ICE MAKER


COAST ICE & COLD SOLUTIONS

ICEU225 SELF CONTAINED CUBE ICE MAKER

Air and Water Cooled

A. Ice maker water in 3/8" FPT.
B. Bin and ice maker drain, 3/4" FPT.
C. Hole for electrical connections, 7/8"

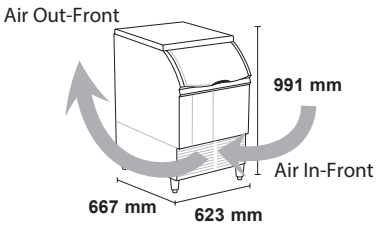

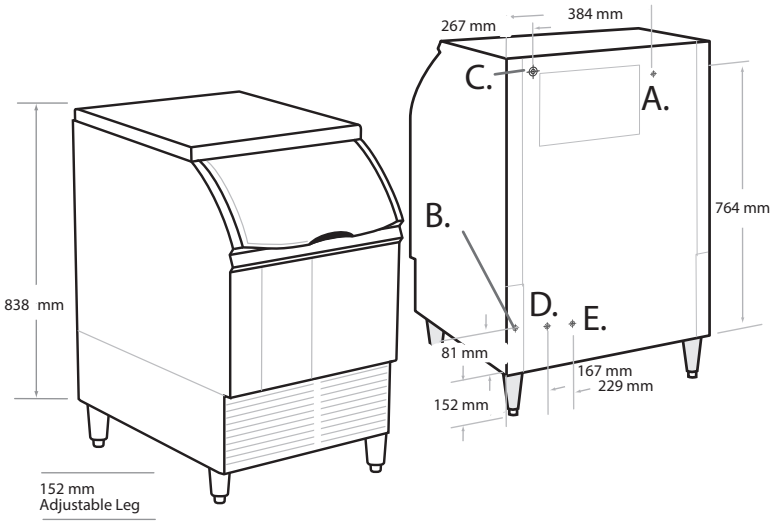

Front & Rear View

Operating Requirements

	MINIMUM	MAXIMUM
		50 Hz
Ambient Temp. Range Air	10°C	43°C
Water Temp.	4.4°C	
Water Pressure	1.4 BAR	4.1 BAR

Dimensions

ALL MODELS	
W x D x H (mm)	623 x 667 x 991
870mm high on castors	

Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage	kWH Used	Watts Used	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
		21°c air/ 10°c water kg	32°c air/ 21°c water kg	Litres per 45 kg of ice @ 32°c air / 21°c water	Per 45 kg of ice @ 32°c air / 21°c water	Per Hr @ 32°c air / 21°c water				
ICEU225A	Air	96	65	124	8.80	520	220-240/50/1	4.9	16	3,774

NOTES:
Number of Wires: 3 (including ground)
Approx. Shipping Weight kg: ICEU225A 73
Refrigerant Type: R404A

Coast Distributors Pty Ltd
PO Box 288, Unanderra, NSW 2526
Phone: (02) 9524 1234
sales@coastdistributors.com.au
www.coastdistributors.com.au

Rev: 04/16
Part: 1020