INVENTIVE SIMPLIFICATION

XEFT-03HS-ELDV

Project _____

Item _____

Quantity _____

Date _____

Model
BAKERLUX SHOP.Pro™ LED

- Convection oven
- Electric
- 3 trays 460x330
- Drop-down door opening
- Control panel with 7-segment display



DESCRIPTION

Convection oven with humidity and 2 programmable fan speeds. Easy-to-use oven, ideal for baking breakfast and snack products, in particular pastry and frozen bakery ones. The digital panel allows the storage of 99 programs with 3 cooking steps plus preheating, 12 of which with immediate access. Rounded stainless steel chamber to facilitate cleaning and ensure maximum hygiene.

STANDARD BAKING FEATURES

Programs

- **99** Programs

Manual cooking

- **Temperature:** 30 °C – 260 °C
- Up to 3 cooking steps
- Humidity set by 20%

STANDARD TECHNICAL FEATURES

- Baking chamber in high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Baking chamber lighting through LED lights embedded in the door
- Baking chamber with chrome-plated steel rack rails with anti-tipping system
- 2-speed fan system and high-performance circular resistance

ADVANCED AND AUTOMATIC BAKING FEATURES

Unox Intensive Cooking

- **DRY.Plus:** extracts humidity from the cooking chamber
- **STEAM.Plus:** creates instant humidity starting from 48 °C
- **AIR.Plus:** multiple fans with reverse gear and 2 speed settings

APP & WEB SERVICES

- Combi guru app

XEFT-03HS-ELDV

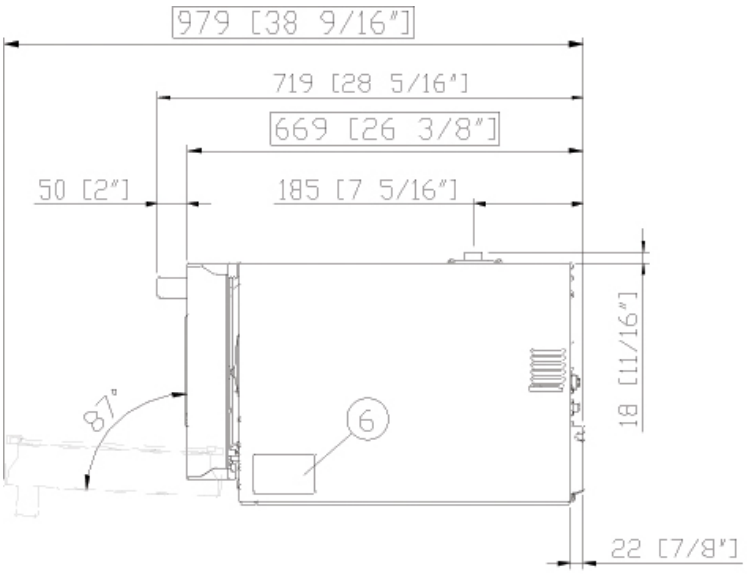

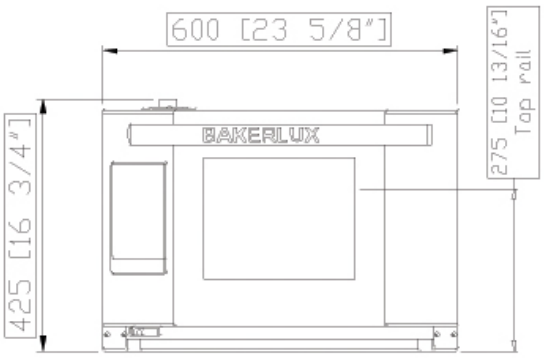

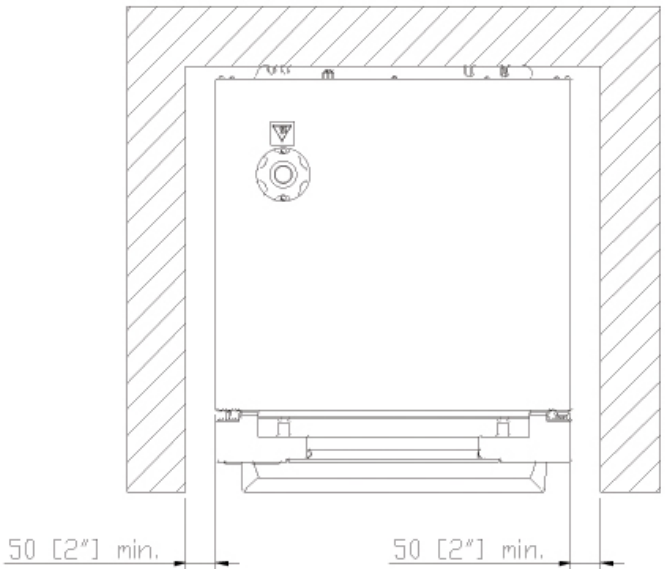

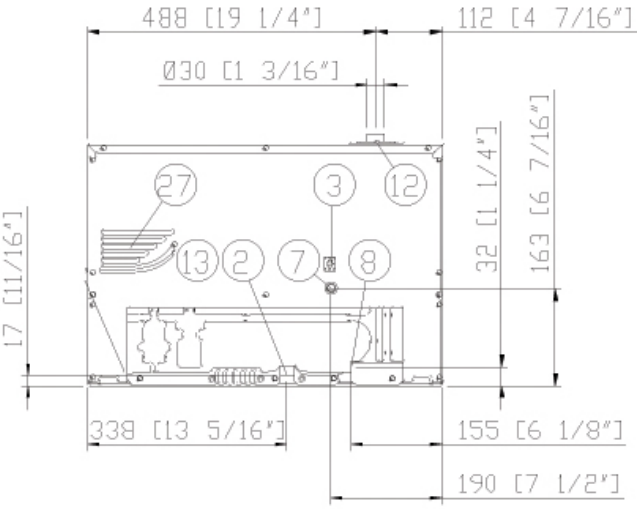

DIMENSIONS AND WEIGHT

Width	600 mm
Depth	669 mm
Height	425 mm
Net Weight	36 kg
Pan spacing	75 mm

CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat
8	3/4" Thread water inlet
12	Hot fumes exhaust chimney
13	Accessories connection
27	Cooling air outlet

UNOX S.p.A. | Via Majorana 22 - 35010 Cadoneghe PD - Italy - Tel. +39 049 8657511 - Fax. +39 049 8657555 - **info@unox.com**

XEFT-03HS-ELDV

POWER AND GAS SUPPLY

STANDARD

Voltage	220-240 V
Phase	~1PH+PE
Frequency	50 / 60 Hz
Total power	3 kW
Maximum Amp Draw	12.8 A
Required breaker size*	16 A
Power cable requirement	H07RN-F 3G 3G
Cord diameter	10 mm
Plug	Schuko

ACCESSORIES

- **Baking Essentials:** special trays
- **SPRAY&Rinse:** Practical spray detergent to manually clean all kinds of oven. Degreases and removes all kind of dirt
- **PURE:** the filter reduces the carbonate hardness in water, thus avoiding scale deposits inside the oven cooking chamber

INSTALLATION REQUIREMENTS

Installations must comply with all local electrical systems, particularly as for minimum wire gauge required for field connection, hydraulic and ventilation supply.

Register to access data and product specifications
infonet.unox.com